

Service Door Alarm

For service/delivery door applications where an alarmed exit device is required, the ES4200-723 is the right solution for you. This door management alarm helps a store manager maintain the security and safety of their store.




FEATURES & BENEFITS

- Aesthetically pleasing design
- Can be used as a stand-alone product or as part of a security system
- Field selectable alarm timing
- 75 dB low level sounder
- 12-24 VDC/VAC operation
- Easy installation
- Encourages employees and delivery personel to maintain access control procedures
- Reset/bypass keyswitch and remote input
- Visual status indicator
- Tamper resistant
- Intrusion detection
- Incorporates form C output relays
- Supports door supervision



Designed Security, Inc. 302 Detex Drive New Braunfels, TX 78130 800-272-3555 512-321-4426

www.dsigo.com dsi@dsigo.com

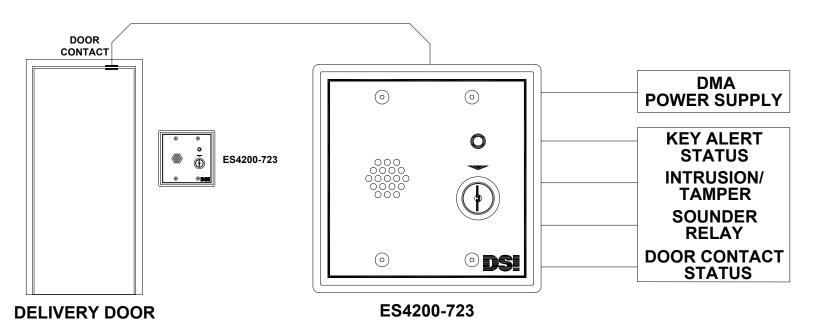

ELECTRICAL SPECIFICATIONS

Power:	12-24 VDC/VAC @ 250 mA
Local Control:	Keyswitch for Unit Reset/Bypass
Control Input:	N/C Door Contact N/O Remote Reset/Bypass
Control Output:	N/O and N/C Door Contact Status N/O and N/C Alarm Status N/O and N/C Intrusion/Tamper Alarm Status N/O and N/C Key Alert Status Remote LED
Adjustment:	Reset 0 sec. – 5 min. or Manual Reset Key Alert Time Select 0 sec 90 min.
Audible Alarm:	Audible Alarm: 75 dB@ 3 ft.
MECHANICAL SPECIFICATIONS	
Dimensions:	2 Gang Plate with Standard Key

- Dimensions: 2 Gang Plate with Standard Key 4.6"W x 4.5"H x 2.32"D
- Keyswitch: Double Pull Medeco
- Finish: Painted DSI Beige

PRODUCT DESCRIPTION

Key controlled bypass puts unit into indefinite bypass, allowing for the door to be propped open for deliveries.

Upon closure of the door and expiration of the key alert timer a reminder alarm will sound until the unit is rearmed with a key.



Designed Security, Inc. 302 Detex Drive New Braunfels, TX 78130 800-272-3555 512-321-4426

www.dsigo.com dsi@dsigo.com